


ENERGIZER NO. 276



Industry Standard Dimensions in mm (inches)

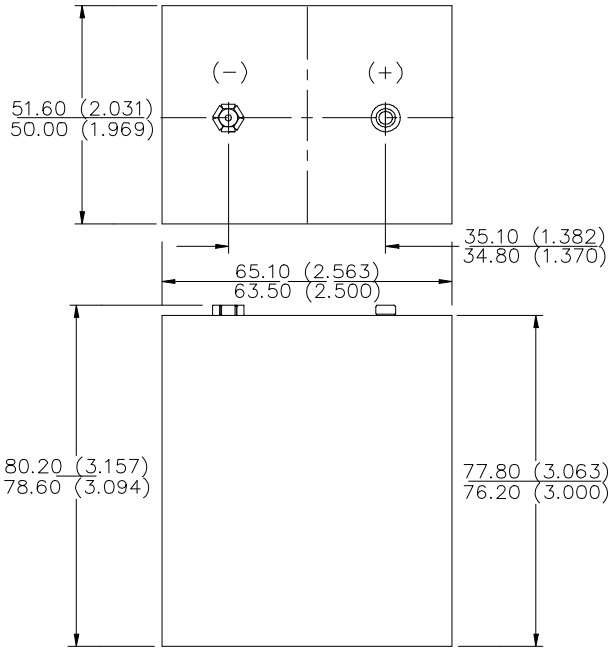

Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)

Designation: ANSI / NEDA-1606, IEC-6F100

Battery Voltage: 9.0 Volts

Average Weight: 245 grams (8.6 oz.)

Volume: 261 cubic centimeters (15.9 cubic inch)


Average Capacity: 5000 mAh to 0.8 volts/cell
 (Rated at 25 mA continuous drain at 21°C)

Cells: Thirty six No. 117 - Six parallel strings of six in series.

Jacket: Paper

TYPICAL DISCHARGE CURVE

Simulated Test @ 21°C (70°F)

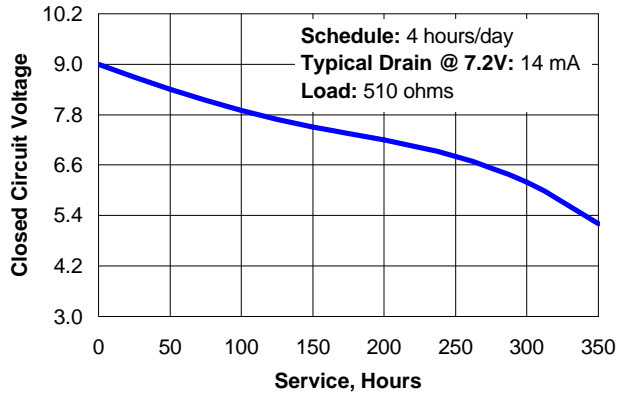

Simulated Application Test Estimated Average Service at 21°C (70°F)

| Schedule: | Typical Drains at 7.2V (milliamperes) | Load (ohms) | Cutoff Voltage | | | | |
|-------------|---------------------------------------|-------------|----------------|------|------|------|-----------|
| | | | 4.2V | 4.8V | 5.4V | 6.0V | 6.6V 7.2V |
| 4 hours/day | 14 | 510 | 335 | 333 | 310 | 2.66 | 2.10 |

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. Inc. - All Rights Reserved