


## ENERGIZER NO. 412



Industry Standard Dimensions in mm (inches)

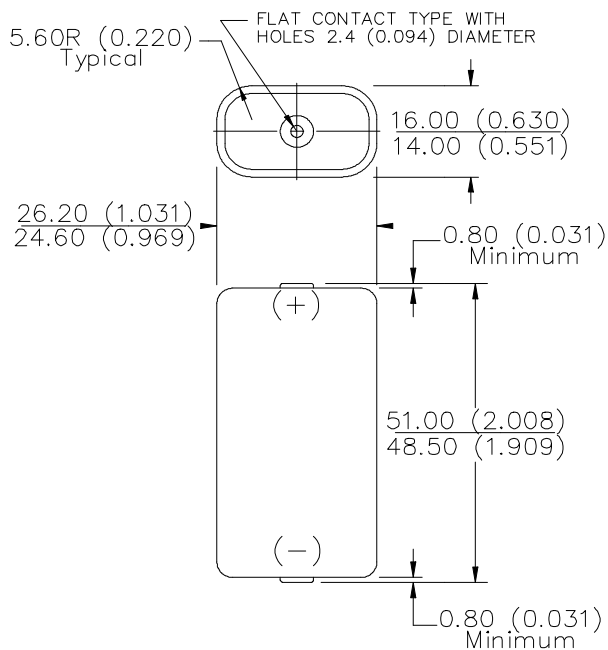

**Chemical System:** Zinc-Manganese Dioxide (Zn/MnO<sub>2</sub>)

**Designation:** ANSI / NEDA-215, IEC-15F20

**Battery Voltage:** 22.5 Volts

**Average Weight:** 38 grams (1.3 oz.)

**Volume:** 21 cubic centimeters (1.3 cubic inch)


**Average Capacity:** 140 mAh to 0.8 volts/cell  
 (Rated at 25 mA continuous drain at 21°C)

**Cells:** Fifteen No. 112 in series

**Jacket:** Metal

### TYPICAL DISCHARGE CURVE

Simulated Test @ 21°C (70°F)

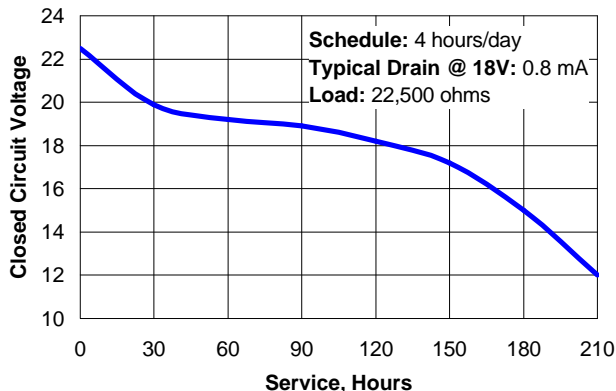

### Simulated Application Test Estimated Average Service at 21°C (70°F)

Schedule:	Typical Drains at 18V (milliamperes)	Load (ohms)	Cutoff Voltage					
			12V	13.5V	15V	16.5V	18V	19.5V
4 hours/day	0.8	22,500	209	197	184	167	134	55

### Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. Inc. - All Rights Reserved